



voestalpine BÖHLER Edelstahl GmbH & Co KG www.voestalpine.com/bohler-edelstahl



-

# ONE SOURCE – FROM THE MELT TO THE FINISHED PRODUCT

We are going to be your solution provider, as a centre of excellence for special components for the most demanding applications. Forging specialists are at work in voestalpine BÖHLER's open die forge. Here is where metallurgical expertise, over 100 years of experience in special steels and a passion for precise machining come together.

The result: high-precision components made from materials we tested and developed. The integrated manufacturing process – from melt to finished product – offers the possibility of developing new materials for specific applications and guarantees high quality and safety standards. The advantages for our customers are also apparent in our processes: **one single contact team** is at your side from the enquiry through technical consultations to the offer, from the order to the delivery and invoicing processes.

In short, **your solution provider**, a centre of excellence for special components for the most demanding applications.






"WHEN DEALING WITH BUSINESS PARTNERS, WE BELIEVE IN FAIRNESS AND SUSTAINABILITY. VALUES SUCH AS TRUST, EXPERTIZE, SENSE OF RESPONSIBILITY AND CUSTOMER SERVICES BUILD THE BASES OF OUR ACTIONS."

Your open die forge sales team







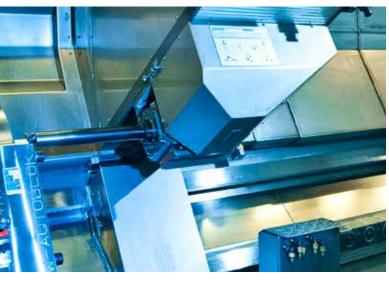





## YOUR MARKET – OUR SEGMENT: ENERGY



Meeting today's energy demand while at the same time being sensitive to the needs of the environment is one of the challenges we face today. Energy-efficient and cost-effective turbines – gas, steam or hydro-powered – form the basis of environmentally friendly and economical energy production.

In turbines, materials are used under the most extreme thermal and mechanical loads. For such extreme conditions, voestalpine BÖHLER has developed high temperature materials, such as 9 – 12 % chromium steel grades, nickel based alloys, which guarantee optimum material properties. We can therefore count the world's most renowned turbine manufacturers among our customers.

The same applies for components in nuclear power plants, where voestalpine BÖHLER manufactures parts for the primary circuit with the highest safety and quality requirements in the industry.



#### Typical products for energy applications

- » Compressor and turbine discs
- » Compressor components
- » High pressure and intermediate pressure rotors
- » Monobloc rotors
- » Shaft ends
- » Hollow shafts
- » Housing components
- » Coolant pump parts
- » Valve and pump bodies
- » Pump shafts
- » Drilled bars and more


#### Material types used:

- » 9–12% Cr steels
- » 3-3.5% NiCrMoV steels
- » 1-2% CrMoV steels
- » Soft martensitic steels
- » Precipitation hardening steels
- » Austenitic stainless steels
- » Ni-base alloys



THE HEAT IS ON









## ENERGY: MATERIALS FOR YOUR DEMANDING APPLICATIONS

BÖHLER grade	Market grade	Standards ASTM	Others	Industry Specifications
Heat treatable steel gr	ades			
BÖHLER V116	26NiCrMoV11-6		1.6948	SEW 555
BÖHLER V128SA	26NiCrMoV15-6 mod.		≈ 1.6957	SEW 555
Stainless chromium ste	el grades			
BÖHLER N350	X17CrNi16-2		1.4057	AISI 431, UNS S43100, AMS 5628
BÖHLER N400	X5CrNi13-4	A182-F6 NM	1.4312	UNS \$41500, DIN EN10250-4
BÖHLER N403	X3CrNiMo13-4		1.4313	UNS \$41500, DIN EN10250-4
PH grades				
BÖHLER N700	X5CrNiCuNb16-4		1.4542	AISI 630, UNS S17400, AMS 5604, JIS SUS630, DIN EN 10250-4
BÖHLER N701	X5CRNICU15-5	XM-12	1.4545	UNS S15500, AMS 5659
Creep resisting steel gr	ades			
BÖHLER D102	30CrNiMoNi5-11		1.6946	SEW 555
BÖHLER D111	25CrMoV3-8			
BÖHLER D623	22CrMoNiWV8-8		1.6945	SEW 555
9 – 12% Chromium ste	el grades			
BÖHLER T505SC	X12CrMoWVNbN10-1-1		1.4906	SEW 555, COST E
BÖHLER T507	X14CrMoWVNbN10-1		1.4902	SEW 555, COST F
BÖHLER T550	X21CrMoV12-1		1.4926	SEW 555
BÖHLER T552	X11CrNiMo12		1.4938	UNS S64152, AMS 5719
BÖHLER T559				COST FB 2
BÖHLER T560	X19CrMoNbVN11-1		1.4913	≈ BS S150, AECMAFE-PM36
Austenitic steel grades				
BÖHLER T200	X4NICRTI25-15	A286	1.4944, 1.4943 1.4980	AISI 660, UNS S66286, AMS 5525, AMS 5731, AMS 5732
BÖHLER A415		A182-F316 LN		
BÖHLER A604SJ	X2CRNI19-11	F304L	1.4306	UNS \$30403
BÖHLER A759	X6CRNINB18-105		1.4553	
BÖHLER A760	X6CrNiNb18-10	F347	1.4550	UNS \$34700
Nickel-base alloys				
BÖHLER L617				Inconel 617
BÖHLER L625	NiCr22Mo9Nb		2.4856	UNS N06625, AMS 5599, AMS 5666, Inconel 625
BÖHLER L718	NiCr19NbMo		2.4668	UNS N07718, AMS 5662, AMS 5663, AMS 5664, Inconel 718



## TESTING AT IT'S BEST







# YOUR MARKET – OUR SEGMENT: OIL AND GAS

### THE CHEMISTRY OF LIFE

The exploration and extraction of fossil fuels from the bottom of our oceans, the manufacture of plastics or the processing of drinking-water have become common place. Only when these services are disrupted do we notice the extent of our reliance on them. Therefore it is important to offer materials specially designed for highly corrosive environments and extreme mechanical stresses to the industry.

### **Typical products**

- » Tubing and casing hangers
- » Components for mooring systems (swivels)
- » Valve bodies
- » Hollow bars
- » Hollow shafts
- » Y-pieces
  - » Components for centrifugal separators
  - » Stabilizers
  - » Non-magnetic shafts
  - » Impellers
- » Discs
- » Flanges


BÖHLER grade	Market grade	Standards ASTM	Others	Industry Specifications
Heat treatable steel gr	rades			
BÖHLER N400	X5CrNi13-4	A182-F6 NM	1.4313	UNS \$41500, DIN EN10088-3
BÖHLER N404	X4CrNiMo16-5-1		1.4418	AFNOR Z6CND16-05-01
PH grades				
BÖHLER N700	X5CrNi13-4	A182-F6 NM	1.4312	UNS \$41500, DIN EN10250-4
BÖHLER N701	X4CRNIMO16-5-1		1.4418	AFNOR Z6CND16-05-01
Nickel-base alloys				
BÖHLER L625	NiCr22Mo9Nb		2.4856	UNS N06625, AMS 5599, AMS 5666, Inconel 625
BÖHLER L718	NiCr19NbMo		2.4668	UNS N07718, AMS 5662, AMS 5663, AMS 5664, Inconel 718
BÖHLER L718API	NiCr19NbMo			UNS N07718, API 6A CRA, NACE MR0175 / ISO15156
BÖHLER L718AMS	NiCr19NbMo	B637	2.4668	UNS N07718, AMS 5662, AMS 5663
Non-magnetic steel gr	ades			
BÖHLER P501	X2CrNiMoNNb21-16-5-3	≈ XM-19	1.3964	≈ UNS S20910
BÖHLER P503	X2CrNiMoNNb23-17-6-3		1.3974	
Duplex and super-dup	iex steel grades			
BÖHLER A903	X2CrNiMoN22-5-3	F51	1.4462	UNS S31803, AFNOR Z2CND22-5 AZ
BÖHLER A911	X2CrNiMoCuWN25-7-4		1.4501	UNS S32760
BÖHLER A913	X2CrNiMoCuN 25-6-3	F53	1.4410	UNS \$32750

8











# YOUR MARKET – OUR SEGMENT: <mark>AEROSPACE</mark>

### SAFETY ACCEPTS NO COMPROMISE

Manufacturing components for aviation and space programs requires the highest technological standards, strict quality management setup and a great deal of responsibility from the people involved in order to meet the requirements of the world's most significant manufacturers of aircraft engines.

### **Typical products**

- » Helicopter rotor shafts
- » Turbine shafts
- » Stub shafts
- » Casing and cover turbine pump starters (Ariane V)
- » Drive train shafts
- » Pancake discs for prototyping

#### **Special notes**

DFARS: DFARS 252.225.7014: Clause c1, DFARS 225.872

Buy American:

Austria is listed as a qualified country in DFARS 225.872-1, 252.225-7012 because the United States and Austria have signed reciprocal defense procurement MoU. Austrian material may be used in "Buy America" applications where the total value of Austrian material is less than 50% of the value of the component.

voestalpine BOHLER Edelstahl is an eligible supply source according to DFARS 252.225-7009.


BÖHLER grade	Market grade	Standards ASTM	Others	Industry Specifications
Heat treatable steel gr	ades			
BÖHLER V124SC	≈ 40NiCrMo6	AISI 4340		UNS G43400, AMS 6414
BÖHLER V132	41SiNiCrMoV7-6		≈ 1.6928	AMS 6257, AMS 6419
BÖHLER V140	≈ 40NiCrMo6	AISI 4340	≈ 1.6565	UNS K23028, AMS 6414
BÖHLER V358	39CrMoV13-9		1.8523	3 S132
PH grades				
BÖHLER N700	X5CrNiCuNb16-4		1.4542	AISI 630, UNS 17400, AMS 5604, JIS SUS630, DIN EN 10250-4
BÖHLER N701	X5CrNiCu15-5	XM-12	1.4545	UNS S15500, AMS 5659
BÖHLER N709	X3CrNiMoAl13-8-2	XM-13	1.4534	UNS S13800, AMS 5629
BÖHLER T670	X5CRNIMOCUNB14-5	≈ XM-25	1.4594	UNS S45000, BS S143
Creep resisting steel gr	ades			
BÖHLER T552	X12CrNiMoV12-3		1.4933, 1.4938, 1.4939	≈ S151, ≈ S538, AISI XM-32
BÖHLER T200	X4NiCrTi25-15	A286	1.4943, 1.4944, 1.4980	UNS S66286, AMS 5731, AMS 5732
Maraging steel grades				
BÖHLER V720	X2NiCoMo18-9-5	Marage 300	1.6354	UNS K93120, UNS K93160, AMS 6521, AMS 6514
BÖHLER V723	X2NiCoMo18-8-5	Marage 250	1.6359	UNS K92890, AMS 6512
Nickel-base alloys				
BÖHLER L625	NiCr22Mo9Nb		2.4856	UNS N06625, AMS 5599, AMS 5666, Inconel 625
BÖHLER L718	NiCr19NbMo		2.4668	UNS N07718, AMS 5662, AMS 5663, AMS 5664, Inconel 718

## HIGH FLYING MATERIALS

cesa ariane



© ESA-Stephane Corvaja Ariane 5 is an ESA programme, designed and developed by CNES for ESA and which exploitation is entrusted to Arianespace.

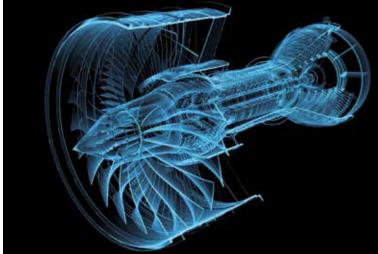



# YOUR MARKET – OUR SEGMENT: EXTRUSION

### **COMPLEX SOLUTIONS**

voestalpine BÖHLER is the world leader in tool steel manufacturing and research. This experience is incorporated into our extrusion products. With highly sophisticated FEM analysis tools we simulate your process conditions to provide the right solutions.

#### **Typical products**

- » Fully equipped containers
- » Mantles
- » Liners
- » Stems
- » Refitting services

ÖHLER grade	Standards			Industry Specifications
	DIN	BS	AISI	
BÖHLER W300	1.2343, X38CrMoV5-1	≈ BH11	H11	UNS T20811
BÖHLER W400	≈ 1.2343	≈ BH11	≈ H11	≈ UNST20811
BÖHLER W302	1.2344, X40CrMoV5-1	GH13	H13	UNS T20813
BÖHLER W303	1.2367, X38CrMoV5-3			
BÖHLER W304	1.2605, X35CrWMoV5	~ BH12	H12	UNS T20812
BÖHLER W403	≈ 1.2367, ≈ X38CrMoV5-3			
ÖHLER W320	1.2365, X32CrMoV3-3	BM10	≈ H10	UNS T20810
ÖHLER W350				
BÖHLER W360				
BÖHLER W720	≈ 1.2709, 1.6354			UNS K93160, UNS K93120, ASTM Marage 300
BÖHLER W750	≈ 1.2779, X6NiCrTi26-15		≈ 660	≈ ASTM A286, ≈ UNS 566286
BÖHLER L718	2.4668, NiCr19NbMo			AMS 5662, AMS 5663, AMS 5664, UNS N07718, ASTM B637, ASTM B670




00






BÖHLER







## TRENDSETTING TECHNOLOGIES FOR METALLURGICAL TOP PERFORMANCE



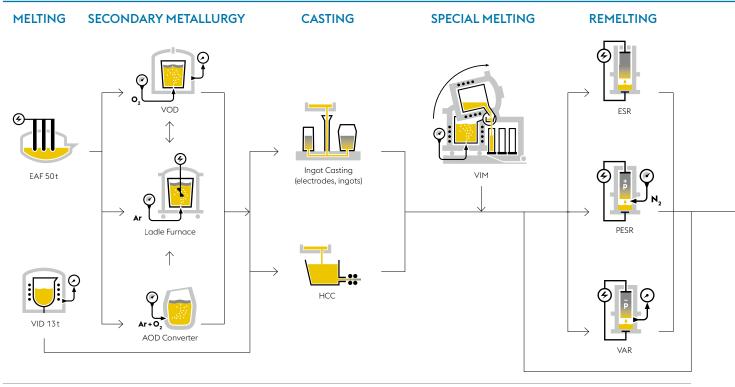





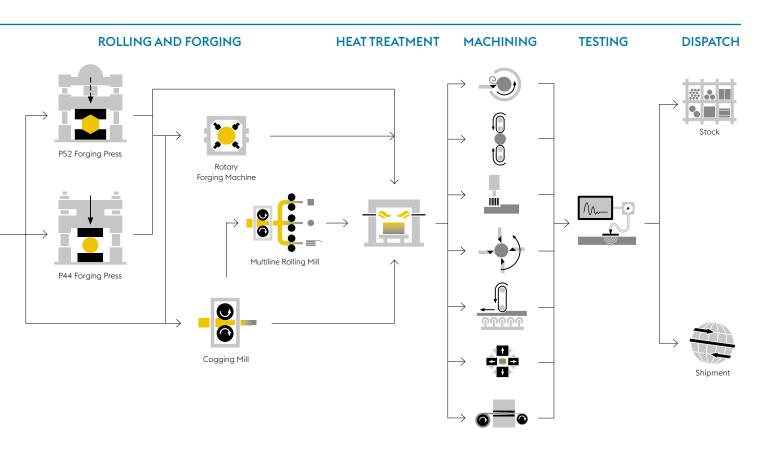

## METAMORPHOSIS COMMITMENT TO PASSION AND PERFECTION

### OUR PATH TO MEET THE TOUGHEST REQUIREMENTS FOR YOUR PRODUCTS

Production facilities – Melting			
Conventional steel mill	Primary melting in 50 t electric arc furnace or 14 t vacuum induction furnace treatment in 50 t argon oxygen decarburisation converter and at- tached secondary metallurgy	Ingots, HCC casted billets	
Special melting and remelting plant	Primary melting in 16 t vacuum induction melting furnace, vacuum arc remelting facilities, open and pressure/protective gas electro-slag remelting facilities	Vacuum melted electrodes and vacuum remelted ingots max. 16 t for double and triple melt routes; ingots ESR/PESR max. 32 t; High alloyed products for high demanding applications in aerospace, energy, oil and gas and special alloys.	

Production facilities – Forging			
4400 to press			
5200 to press	The 5200 ton press with its two integrated mani- pulators forms the heart of our forging shop.	Rotors for turbines and generators, turbine discs, open die forgings, rings, hollow shafts, discs, round/square/flat bar; forging weight appr. 40 t, max. forging length approx. 12 m	
Rotary forging machine	The rotary forging machine with its high perfor- mance and precise dimensional tolerances is the ideal forging tool for the production of steel bars and open die forgings.	Rotationally-symmetrical and contour shaped open die forgings; round, square, flat bar; forging weight 8 t max.; max. forging length 21 m; max. forging diameter 550 mm	

Production facilities – Heat Treatment				
Boogie hearth furnace	Gas heated furnaces, max. load 150 t, max. size 11,300 (16,000) x 3,100 x 1,850 (2,500) mm, temperature range 450 – 1250°C, furnace class accord: AMS 2750-2-4	Forgings to optimise microstructure and mechanical properties according to customer specification		
Spray hardening equipment	Length 1.0 – 10 m, diameter 250 – 1,100 mm, max. load 30 t Spraying with water-air mixture or compressed air	Rotors and shafts to achieve rotationally symmetrical structure formation, minimal deformation and the possibility to adjust different specific structural properties on a single piece		

Production facilities – Machining				
Turning	<ol> <li>CNC vertical turning and boring lathes: max. Ø 2,900 x 1,900 mm</li> <li>CNC horizontal lathes without tailstock: max. Ø 1,000 x 400 mm</li> <li>Small/medium CNC horizontal lathes (one with milling device) max. Ø 1,000 x 6,000 mm resp. Ø 700 x 10,000 mm</li> <li>Large CNC horizontal lathes (one with milling device) max. Ø 2,000 x 12,000 mm</li> </ol>	Components for steam and gas turbines (discs, rings, hollow shafts, rotors, housings), components for nuclear, extrusion, oil & gas and aviation applications		
Boring, milling	CNC milling and drilling machine max. 2,000 x 3,000 x 4,000 mm, max. weight 25 tons	Extrusion components, Oil & Gas components		
Deep hole drilling	Drilling machines max. Ø 400 x 8,000 – 10,000 mm, max. weight 15 tons	Aerospace, energy, oil & gas, nuclear and extrusion components		
Sawing	Band saws max. Ø 1,800 x 6,000 mm, max. 30 tons	Discs, housings, rotors, steel bars		
Container relining centre	Max. size of parts: dia 2,000 mm x 2,300 mm Range of temperature: max. 520 °C Max. weight: 20 tons	Extrusion container		

Production facilities – Machining				
Manufacture of specimens	Turning and milling lathes	Test specimens for mechanical tests		
Thermal stability testing	Checking the stability of turbine rotors at eleva- ted/operating temperatures	Rotors for steam and gas turbines up to 1,300 mm dia x 6,000 (10,000) mm heated (total) length, max. weight 20 t		
Ultrasonic equipment (UT)	<ol> <li>Automatic ultrasonic testing: two ultrasonic testing facilities for internal defects (NDT) with automatic drive and data acquisition system</li> <li>Manual ultrasonic testing: for internal defects (NDT)</li> </ol>	Discs, rings and hollow shafts, max. dia 3,200 mm, height 2,200 mm, max. weight 35 t Forgings in all dimensions i.e. shafts, discs, rotors		
Magnetic particle equipment (MPI) dye penetrant testing (FPI)	Surface defects testing with magnetic particle or dye penetrant inspection (visible or fluorescent method)	Forgings in all dimensions i.e. shafts, discs, rotors		
Measuring equipment	Dimensional checking			
Microscope	Scanning electron microscope (SEM) for investiga- tions of the microstructure			
Mechanical testing equipment	Checking the mechanical properties of the material on state of the art automatic testing equipment			

# FORGING THE SUPREME DISCIPLINE OF A PART FORMING

### 52 MN PRESS - MASTERING THE OPEN DIE FORGE PIECES.

The heart of the open die forge is our 5200 t forging press, where materials are shaped to meet exact customer demands. Forged pieces are used whenever the requirements for the mechanical properties of certain components are high.

We at voestalpine BÖHLER are well aware of these requirements and offer you custom-made open die forgings or round and flat steel bars in high alloyed materials. Piece weight from 3 to 30 tons can be produced to order.





### **ROTARY FORGING MACHINE**

With this most modern and unique production line, voestalpine BÖHLER is venturing into a new dimension of forged bars and open die forgings.

With its high throughput and precise dimensional tolerances, voestalpine BÖHLER will now be able to manufacture forgings from 110 to 550 mm in diameter and a maximum of piece weight of 8,000 kg in contured shapes and multiple pieces as well.


The maximum forging force of 2,000 t, the high-performance and rapid manipulators for precisely moving parts or ingots during the forging process ensure the highest quality and precision.

# SUPERLATIVE MACHINING

### FROM ROUGH MACHING TO AEROSPACE – AS YOU LIKE IT

The machine shop is the highlight at the end of the production chain. Here is where all of the production steps come together to be matched to your individual requirements. This guarantees the full quality control cycle from a single source.

The forged parts are rough machined on stateof-the-art CNC milling, drilling and turning machines in accordance with the specifications and drawings.

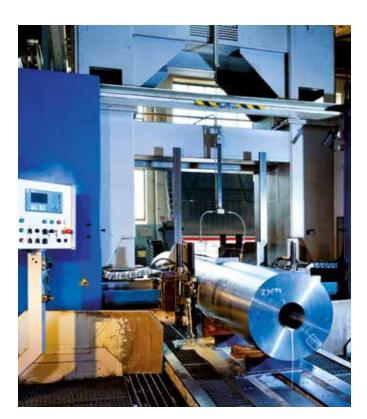

"ALL OUR QUALIFIED AND HIGHLY MOTIVATED STAFF IS THE KEY IN OUR MACHINING SHOP. OUR GOAL IS TO MAKE COMPETITIVE EDGES POSSIBLE FOR YOU." Christian Ziegerhofer

Head of Open Die Forge business unit







## YOUR FASCINATING PRODUCT OUR RISE TO THIS CHALLANGE



### WEIGHT AND SIZE LIMITS

	Line of business	Max Diameter mm / inch	Max length mm / inch	Max weight t / Ibs
Disc	Energy, Oil & Gas	3,000 / 118.1	650 / 25.6	25 / 55,115
Shaft end	Energy	2,000 / 78.7	-	15 / 33,069
Rotor shafts	Energy, Oil & Gas, Aerospace, Extrusion	1,500 / 59.0	10,000 / 393.7	18 / 39,683
Hollow shafts	Energy, Oil & Gas, Extrusion	2,000 / 78.7	-	20 / 44,092
Rings	Energy, Oil & Gas	3,000 / 118.1	-	25 / 55,115













# PASSION FOR UNCOMPROMISE QUALITY

### INSPIRATION TO PEAK PERFORMANCES AND RESPONSIBILITY FOR THE ENVIROMENT

The quality of our products is defined, carefully reviewed and electronically documented every step of the way. From the melting to delivery, through precise process operations, our meticulous recorded results, makes us the most reliable materials partner for the world's top performers.

We place tremendous value on resource protecting and environmentally health & safety production. We are proud to be the first steel company to run certified EH&S management system.

Products are made by people and Quality starts in our minds.

### International certifications are confirmation of our culture of complete quality.

#### Main Material Approvals

Institution	Certificates
» VdTÜV	WB 508
» VdTÜV	WB 479
» VdTÜV	WB 400
» VdTÜV	WB 424
» NORSOK	M-CR-650
» VdTÜV	HD-AGA
» API	API 6A718

#### **Specification** 1.4462 / BÖHLER A903

2.4602 / BÖHLER L328 2.4602 / BÖHLER L328 2.4819 / BÖHLER L330SA 2,4610 / BÖHLER L333 ASTM A182-F51 / BÖHLER A903 ASTM A182-F55 / BÖHLER A911 ASTM A182-F53 / BÖHLER A913 ASTM A182-F61 / BÖHLER A926 ASTM A182-F44 / BÖHLER A965 ASTM A564 15 5PF / BÖHLER N701 alloy 718 / (BÖHLER L343)

- » NORSOK M-650, Teknologisk Institut Certification AS
- » Equinor, rolled and forged bars in ASTM A276 grade, Norsok Standard M-650
- » Lloyds Register, Steelmaking and bars, Forgings in carbon, carbonmanganese and alloy steel
- » PRI (NADCAP), AC7114, AC7114/3
- » TÜV-Süd, AD2000 Merkblatt / Instruction W0/TRD100/HP0, Pressure equipment directive 97/23/EG

#### Main Quality System Approvals

Institution	Certificates	Specification
» BSI	FM 00777	ISO 9001, EN 9100
» BSI	TS 507782	TS16949
» bmwfw	P-95-29-07-2001	EN ISO / IEC 17025
» NADCAP	Heat Treating	
» NADCAP	Material Testing	
» NADCAP	NonDestructive Testing	
» TÜV Austria	EN ISO 14001:2015	
	OHSAS 18001:2007	
	EN ISO 50001:2011	
» TÜV-Süd	28.04.2004	AD2000 W0 / TRD 100
	KTA 2301.1	
	PED bzw. DGL 97/23/EG	

#### Main Laboratory Approvals

» bmwfw, EN ISO/IEC 17025

» PRI Performance Review Institute (NADCAP)



## RESEARCH INOVATION IS HOW WE REMAIN FIT FOR THE FUTURE

### IT IS THE MIND THAT CONTROLS THE BODY

Today, to a certain degree, it is possible to design new materials at the computer. A quantum leap. Targeted use of simulation programmes allows complex alloying systems to be captured numerically and to predict the phases which will appear, their composition and their volume fractions. This leads to a better understanding of the materials and also reduces laboratory time and costs during development. In this way, materials and tailor-made properties can be designed.

State-of-the-art facilities allow materials properties to be measured which form the basis for the development of alloys with improved properties. In addition, this data is the indispensable basis for the numerical simulation of metallurgical processes from which the optimum manufacturing parameters can be determined.

The development work within the European Cost research programs is a good basis in working together with customers, universities and research institutes which has resulted in the successful development of new generation materials. But not only steels also Ni-base alloys are also emphasised at voestalpine BÖHLER. In the framework of the European collaboration works Thermie AD700, voestalpine BÖHLER contributed to manufactuing a full-scale trial forging in alloy 625 for the 700 °C power generation technology. In future voestalpine BÖHLER will be a member of the European KMM-VIN action and will also be involved in developing other materials for the highest requirements.

We are further involved in material research programmes together with customers in oil & gas, aerospace and many other high-demand applications. Based on our long history of breakthrough innovations in new materials for tooling applications we are heavily involved in creating totally new alloying concepts.

EGHLER

K 5589

PAR

"INNOVATION IS A TRADITION AT VOESTALPINE BÖHLER AND HAS ALWAYS BEEN A CORE PART OF THE COMPANY'S STRATEGY. MORE THAN 300 PATENTS AT HOME AND ABROAD ARE PROOF OF THE PERFORMANCE OF OUR RESEARCH AND DEVELOPMENT DEPARTMENT."


> Klaus Sammt Vice President Research & Development, Laboratories











The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.



voestalpine BÖHLER Edelstahl GmbH & Co KG Mariazeller Straße 25 8605 Kapfenberg, Austria T. +43/50304/20-7181 F. +43/50304/60-7576 E. info@bohler-edelstahl.at www.voestalpine.com/bohler-edelstahl

SC127EN - 05.2019

