

ACIERS À COUPE RAPIDE

Variantes de produits disponibles

Produit long

Description du produit

BÖHLER S400 - « Le rapide »

Cette nuance est issue du groupe des aciers rapides alliés au molybdène et séduit par ses bonnes performances associées à une bonne rentabilité économique.

Procédé d'élaboration

Airmelted

Propriétés

- > Ténacité et ductilité : élevé
- > Résistance à l'usure : bien
- > Résistance à la compression : élevé
- > Stabilité des bords : bien
- > Aptitude au meulage : élevé
- > Dureté à chaud (dureté rouge) : bien

Applications

- > Forets et tarauds
- > Taillage d'engrenage, rabots
- > Broches et alésoirs

Données techniques

Désignation normalisée		Normes	
1.3348	SEL	4957	EN ISO
HS2-9-2	EN	A600	ASTM
M7	AISI		

Composition chimique

C	Si	Mn	Cr	Mo	V	W
1,02	0,4	0,3	3,8	8,6	1,9	1,8

Comparaison des caractéristiques

	Résistance à la compression	Capacité à être meulé	Dureté à chaud	Ténacité	Résistance à l'usure abrasive	Stabilité du tranchant
BÖHLER S400	★★★	★★★	★★★	★★★	★★	★★
BÖHLER S200	★★★	★★	★★★	★★	★★★	★★
BÖHLER S401	★★	★★★	★★	★★★	★★	★★★
BÖHLER S404	★★	★★★	★★	★★★	★★	★★
BÖHLER S405	★★★	★★★	★★	★★★	★★	★★
BÖHLER S430	★★	★★★	★★	★★★	★★	★★
BÖHLER S500	★★★★	★★★	★★★★	★★	★★★	★★★
BÖHLER S600	★★★	★★★	★★★	★★	★★	★★★
BÖHLER S607	★★★	★★★	★★★	★★	★★★	★★★
BÖHLER S630	★★★	★★★	★★★	★★	★★	★★★
BÖHLER S705	★★★	★★★	★★★★	★★	★★	★★★★
BÖHLER S730	★★★	★★★	★★★★	★★	★★	★★★★

Condition de livraison

Recuit

Dureté (HB)	max. 280 Drawn max 300 HB
Résistance à la traction (N/mm ²)	max. 1 020

Traitement thermique

Recuit

Température	770 jusqu'à 840 °C	Controlled slow cooling in furnace (10 - 20°C / h (50 - 68°F / h) to approx. 600°C (1110°F), air cooling.
-------------	--------------------	---


Recuit de détente

Température	600 jusqu'à 650 °C	Slow cooling furnace. To relieve stresses set up by extensive machining or in tools of intricate shape. After through heating, hold in neutral atmosphere for 1 to 2 hours.
-------------	--------------------	---

Trempe et revenu

Température	1 170 jusqu'à 1 210 °C	Salt bath, vacuum Preheating: 1st stage ~ 500 °C, 2nd stage ~ 850 °C, 3rd stage ~ 1050 °C Austenitising: 1170 - 1210 °C, holding time after complete heating 80 seconds, maximum 150 seconds, to avoid material damage due to overheating. Quenching: oil, warm bath (500 - 550 °C), gas
Température	540 jusqu'à 570 °C	Slow heating to tempering temperature immediately after austenitising. Dwell time in the furnace 1 hour per 20 mm material thickness (at least 1 hour) Slow cooling to room temperature 3 tempering cycles recommended Hardness see tempering chart


Continuous cooling CCT curves

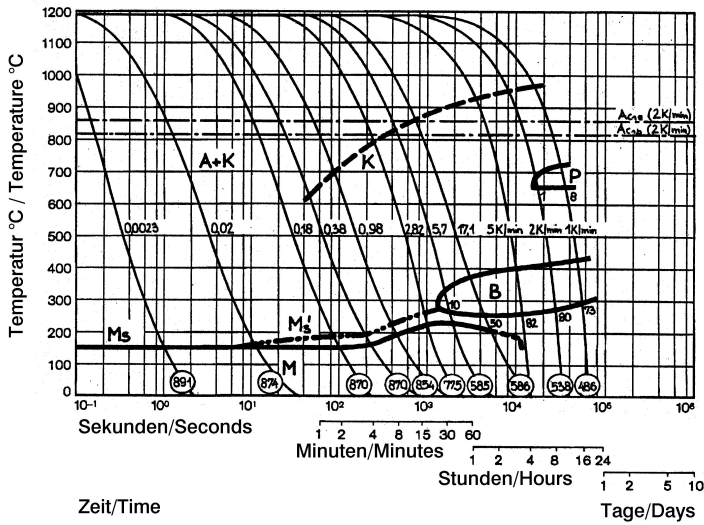

Austenitising temperature: 1190°C (2174°F)
Holding time: 180 seconds

- A....Austenite
- B....Bainite
- K....Carbide
- P....Pearlite
- M....Martensite
- RA...Retained Austenite

Quantitative phase diagram

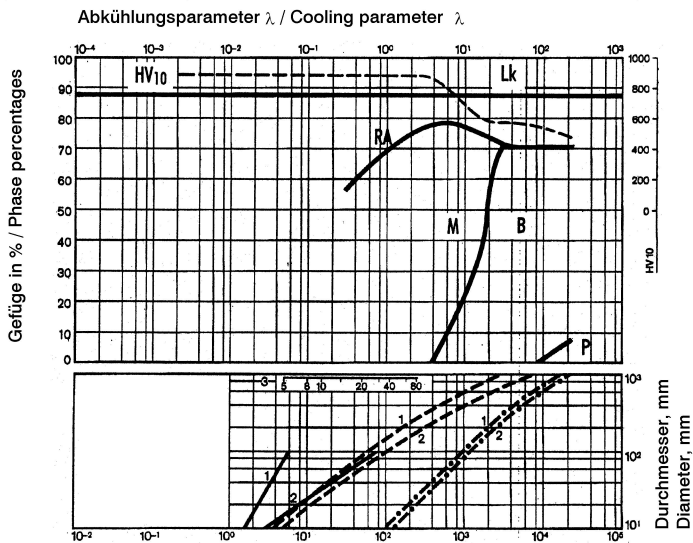


- A....Austenite
- B....Bainite
- K....Carbide
- P....Pearlite
- M....Martensite
- RA...Retained Austenite

- 1....Edge or Face
- 2....Core
- 3....Jominy test: distance from quenched end

Kühlzeit von 800°C auf 500°C in Sek. / Cooling time in sec. from 800°C to 500°C

Tempering Chart

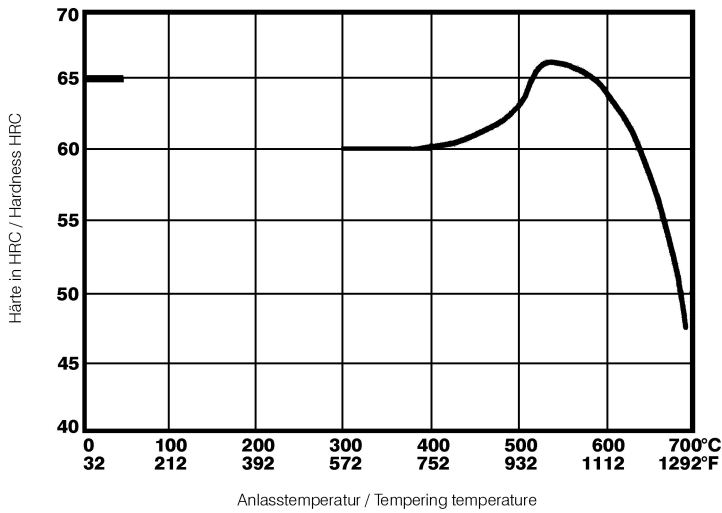

Holding time 3 x 2 hours
Specimen size: square 25 mm

Propriétés physiques

Température (°C)	20
Densité (kg/dm ³)	8,3
Conductivité thermique (W/(m.K))	19
Chaleur spécifique (kJ/kg K)	0,46
Résistivité électrique (Ohm.mm ² /m)	0,65
Module d'élasticité (10 ³ N/mm ²)	217

Dilatation thermique

Température (°C)	100	200	300	400	500	600	700
Dilatation thermique (10 ⁻⁶ m/(m.K))	11	11,5	11,9	12,3	12,4	12,5	12,5

For additional specifications and technical requirements, please contact our regional voestalpine BÖHLER sales companies.

The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.

voestalpine BÖHLER Edelstahl GmbH & Co KG
 Mariazeller Straße 25
 8605 Kapfenberg, AT
 T. +43/50304/20-0
 E. info@bohler-edelstahl.at
<https://www.voestalpine.com/bohler-edelstahl/de/>

ONE STEP AHEAD.